


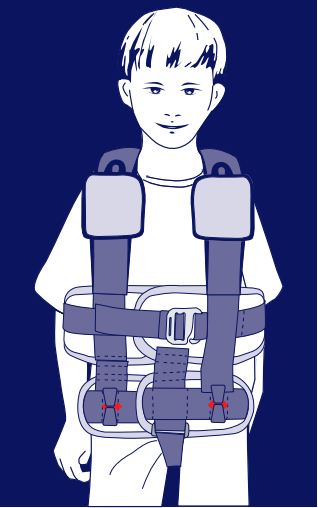

ridesafer®

TRAVEL VEST GEN 6

Use for vests with DOM after 2026/08

Model Numbers: JDB14201xxx

SIZE: LARGE: For Children 65 to 80 lbs (29.5 to 36.3 kg) whose height is 50 to 57 in (127 to 145 cm) Minimum age 3 years old.



- Keep this manual for future use.
- Store in pocket located on right front panel of vest.

<https://ridesafer.net/>

L10-151-02-06A

**WARNING**

DEATH or SERIOUS INJURY can occur

- Failure to follow these instructions and vest labels may result in the child striking the vehicle's interior during a sudden stop or crash.
- DO NOT allow children less than 3 years old to use this child restraint.
- Use only for children who weigh between 65 to 80 lbs (29.5 to 36.3 kg).
- Snugly adjust the vest and vehicle seat belts around the child. Refer to the seat belt adjustment instructions in the vehicle owner's manual.
- A snug strap should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.
- Always position and snugly adjust the lap belt first, then snugly adjust the tether or shoulder belt. The lap belt must be positioned low on the hips, contacting the thighs, not the abdomen.

LAP BELT ONLY USE:

- Use of tether and crotch strap is always required when securing child with only a lap belt.
- If a tether anchor is not available in the seating location selected, secure the child with a lap and shoulder belt or contact Safe Traffic System for further information.
- NEVER use only a lap belt without the tether and crotch strap or without a shoulder belt.

LAP AND SHOULDER BELT USE:

- The shoulder belt must always be positioned on the child's shoulder—never under the arm or behind the back.
- Use the tether and crotch strap whenever possible.

- Follow all instructions in this manual and the labels on the child restraint.
- Register your child restraint with the manufacturer online or by postage-paid registration card.
- DO NOT use the vest, tether, or crotch strap after a crash unless all conditions for reuse are met as outlined in the "Re-use After a Crash" section.

Registration Information:

Child restraints can be recalled for a variety of safety reasons. You must register this restraint to be reached in a recall. Please register your child restraint by filling out and sending the postage-paid registration card that came with your child restraint.

Mail to:

Safe Traffic System, Inc.
10201 Pacific Ave., Franklin Park, IL 60131 USA
or call +01-847-233-0365 or fax +01-847-233-0384
or register online at <http://ridesafer.net/product-registration/>

For recall information, call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236 (TTY: 1-800-424-9153), or go to www.NHTSA.gov.
Or call Safe Traffic System, Inc. at +01-847-233-0365
Log onto <https://ridesafer.net/>

Manufactured and Distributed By:

Safe Traffic System, Inc.
10201 Pacific Ave., Franklin Park, IL 60131 USA
© Safe Traffic System, Inc.
U.S. Pat. 6,902,193 B2 & US 10,661,749B2
Made in Vietnam

SAFETY CHECK LIST

- Read and understand instruction manual and vest labels.
- Child is at least 3 years of age and weighs at least 65 lbs (29.5 kg).
- Lap belt must be low on hips, contacting thighs, not on abdomen.

LAP ONLY SEAT BELT USE:

- Position and snugly adjust lap belt, then adjust tether or shoulder belt.
- Tether and crotch strap are ALWAYS REQUIRED.

LAP and SHOULDER BELT USE:

- Position and snugly adjust lap belt and then shoulder belt .
- Never put shoulder belt under child's arm or behind child.
- Use the tether and crotch strap whenever possible.

- Secure child in back seat whenever possible.
- Top of child's ears must be below top of vehicle seat back.
- Never leave child unattended.
- Discontinue use when child's weight exceeds 80 pounds (36.3 kg).
- Do not allow anyone (babysitter, relatives, etc.) to use travel vest without first understanding all instructions.
- Add-on child restraint systems should be securely belted to the vehicle, even when they are not occupied, since in a crash an unsecured child restraint system may injure other occupants.
- Discontinue use after 5 years from the date of purchase.

HEIGHT & WEIGHT INFORMATION

Requirements for use:


- Minimum age: 3 years old.
- Weight between 65 to 80 lbs (29.5 to 36.3 kg).
- Height between 50 to 57 in (127 to 145 cm).
- Top of child's ears must be below top of vehicle seat back.

Fit of vest on child:

- The vest must be adjusted to fit snugly around the child's chest.
- Bottom front flap of vest must be flat on the thighs of the child.

Discontinue use when:

- Vest is too small to fit around child's chest and waist.
- Lower front panels do not lie flat on top of child's thighs when seated.
- Child's weight exceeds 80 pounds (36.3 kg).



Use with Lap Belt and Tether



Use with tether, lap and shoulder belt

SELECTING A VEHICLE SEATING LOCATION

The RideSafer® Travel Vest is designed for use in forward facing seating positions in passenger cars, sport utility vehicles (SUVs), crossover utility vehicles (CUVs), and light duty trucks equipped with either a vehicle lap belt and tether anchor (tether **MUST** be used) or vehicle lap and shoulder belt (use of tether is highly recommended whenever possible).

How you use the vest depends on the vehicle seat location used, the vehicle seat belt system and availability of a tether anchor in the vehicle.

- Refer to vehicle owner's manual for the type of vehicle seat belts and availability of tether anchors. If the vehicle does not have a tether anchor in a seating location, secure with a lap and shoulder belt or a tether anchor may be able to be added. Refer to vehicle owner's manual or contact vehicle dealer.
- Refer to the vehicle owner's manual for information on securing children and vehicle seat belt use.


Review and follow the information below before using.

Seating Locations:

According to accident statistics, children are safer when properly restrained in the rear seating positions rather than in the front seating positions.

Seating Locations That Can Not be Used

- 1. Low vehicle seat back.**


- Do not use seating locations in which the top of vehicle seat back is below top of child's ears.
- 

Top of vehicle seat below top of ears
- 2. Seats facing side or rear.**

- DO NOT use seating locations that face the rear or sides of the vehicle.




Side Facing Vehicle Seats




Rear Facing Vehicle Seats

RIDESAFER TRAVEL VEST & PARTS

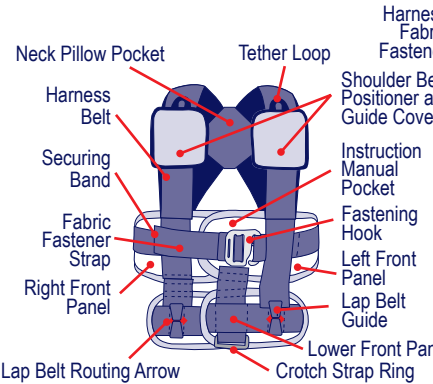


RideSafer® Travel Vest GEN 6

- Neck Pillow Pocket
- Harness Belt
- Securing Band
- Fabric Fastener Strap
- Right Front Panel
- Lap Belt Routing Arrow
- Tether Loop
- Shoulder Belt Positioner and Guide Cover
- Instruction Manual Pocket
- Fastening Hook
- Left Front Panel
- Lap Belt Guide
- Lower Front Panel
- Crotch Strap Ring
- Harness Fabric Fastener
- Harness Adjuster
- Rear Crotch Strap Ring

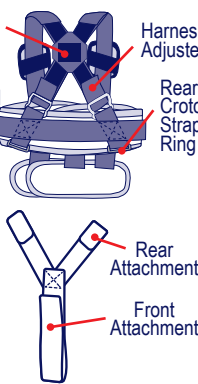

Crotch Strap

- Rear Attachment
- Front Attachment

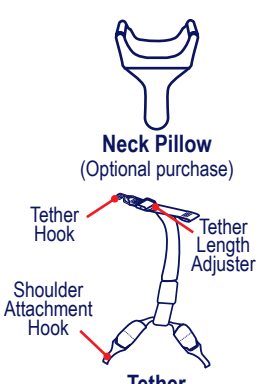

Neck Pillow
(Optional purchase)

Tether
(Optional purchases available outside of North America)

- Tether Hook
- Shoulder Attachment Hook
- Tether Length Adjuster

Vehicle Seat Belts:

1. Lap Belts:

Vehicle Seating Locations With Only A Lap Belt:

- A seating location with only a vehicle lap belt must also have a tether anchor.
- DO NOT use a seating position with a lap-only seat belt that does not have a tether anchor until a tether anchor has been installed.
- Contact Safe Traffic System if further information is needed.

2. Passive Restraint Systems:

Motorized Shoulder Belts:


- DO NOT use seating locations with motorized shoulder belts.

Door Mounted Lap And Shoulder Belt:

- DO NOT use seating locations where seat belts are mounted to the door.


3. Child Restraint Anchorage System/LATCH

- DO NOT use the lower anchors of the vehicle child restraint anchorage system/LATCH with this vest.




Tether Anchor


Lap Belt Only



Motorized Shoulder Belt



Belts Mounted To Front Door



Lower Anchor

**WARNING**

Avoid serious injury or death: DO NOT use vest with vehicle lower anchors for the Child Restraint Anchorage System or LATCH System.

4

6

